



## The MP Rotator

### Setting the Standard for Water Efficiency

#### High Uniformity

Precision-engineered streams provide excellent coverage, and superior wind resistance

#### Low Precipitation Rate

Reduces runoff on slopes and tight soils

#### Flexible Design Tool

From 2.5 to 9 m spacing—any models can be combined on the same zone

#### Automatic Matched Precipitation

Even after arc and radius adjustment

#### Proven Durability & Reliability

Rotator® technology proven since 1987 in the agricultural market

#### Quick, Easy, Arc and Radius Adjustments

Fast installation—no nozzles to change



SPECIFICATION GUIDE	
EXAMPLE: <b>MP2000* - 90</b>	
<b>MODEL</b> MP1000 MP2000 MP3000	<b>ADJUSTABLE ARC</b> 90 = 90° to 210° 210 = 210° to 270° 360 = 360°
<b>MPCORNER</b>	45-105 = 45° to 105°
<b>MPLCS515</b> <b>MPRCS515</b> <b>MPSS530</b>	<b>LEFT</b> <b>RIGHT</b> <b>SIDE</b>

\* Note: Add "HT" to specify male thread


SPECIFICATION GUIDE			
EXAMPLE: <b>MPR40 - 04 - CV - MP2000-90</b>			
<b>MODEL</b> MPR40 = MPR40 (Includes factory-installed 40 PSI pressure regulator)	<b>POP-UP HEIGHT</b> 00 = Shrub 04 = 4" Pop-up 06 = 6" Pop-up 12 = 12" Pop-up	<b>OPTIONS</b> CV = Factory-installed check valve (Pop-up models only)	<b>MP ROTATORS</b> See MP Rotator Specification Guide for details (Not included)

MP Rotator Performance Data – Metric																				
	MP1000 Radius: 2.5 to 4.6 m Adjustable Arc and Full Circle Color Code: Maroon or Olive					MP2000 Radius: 4 to 6.4 m Adjustable Arc and Full Circle Color Code: Black, Green, or Red					MP3000 Radius: 6.7 to 9.1 m Adjustable Arc and Full Circle Color Code: Blue, Yellow, or Gray									
Arc	Pressure Bars	Pressure kPa	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr	Color	Radius m	Flow LPH	Flow LPM	Precip mm/hr			
90°	1.75	175	Maroon = 90° to 210°	---	---	---	---	Black = 90° to 210°	5.2	71	1.18	11	12	Blue = 90° to 210°	7.6	158	2.63	11	13	
	2.00	200		3.7	36	0.61	11		12	5.5	74	1.23	10		11	8.2	166	2.77	10	11
	2.25	225		3.8	38	0.63	10		12	5.6	80	1.33	10		12	8.4	175	2.92	10	12
	2.50	250		4.0	41	0.68	10		12	5.8	86	1.43	10		12	8.5	185	3.08	10	12
	2.75	275		4.1	42	0.70	10		11	6.1	91	1.52	10		11	9.1	195	3.25	9	11
	3.00	300		4.3	44	0.73	10		11	6.4	94	1.57	9		11	9.1	203	3.38	10	11
	3.25	325		4.3	45	0.75	10		11	6.6	97	1.62	9		10	9.1	212	3.53	10	12
180°	1.75	175	Maroon = 90° to 210°	---	---	---	---	Black = 90° to 210°	4.9	133	2.22	11	12	Blue = 90° to 210°	7.6	329	5.48	11	13	
	2.00	200		3.7	72	1.20	11		12	5.2	141	2.35	11		13	8.2	353	5.88	10	12
	2.25	225		3.8	76	1.27	10		12	5.3	150	2.50	11		13	8.4	373	6.22	11	12
	2.50	250		4.0	81	1.35	10		12	5.5	160	2.67	11		12	8.5	393	6.55	11	12
	2.75	275		4.1	84	1.40	10		11	5.8	168	2.80	10		12	9.1	413	6.88	10	11
	3.00	300		4.3	88	1.46	10		11	6.1	174	2.90	10		11	9.1	431	7.18	10	12
	3.25	325		4.3	91	1.51	10		11	6.2	182	3.03	9		11	9.1	449	7.48	11	12
210°	1.75	175	Lt. Blue = 210° to 270°	---	---	---	---	Green = 210° to 270°	4.9	155	2.58	11	12	Yellow = 210° to 270°	7.6	384	6.40	11	13	
	2.00	200		3.7	85	1.41	11		13	5.2	165	2.75	11		13	8.2	411	6.85	10	12
	2.25	225		3.8	89	1.48	10		12	5.3	175	2.92	11		13	8.4	436	7.27	11	12
	2.50	250		4.0	95	1.58	10		12	5.5	185	3.08	10		12	8.5	459	7.65	11	12
	2.75	275		4.1	98	1.63	10		11	5.8	195	3.25	10		12	9.1	481	8.02	10	11
	3.00	300		4.3	102	1.71	10		11	6.1	205	3.42	10		11	9.1	502	8.37	10	12
	3.25	325		4.3	106	1.76	10		11	6.2	214	3.57	9		11	9.1	523	8.72	11	12
270°	1.75	175	Lt. Blue = 210° to 270°	---	---	---	---	Green = 210° to 270°	4.9	199	3.32	11	12	Yellow = 210° to 270°	7.6	501	8.35	12	13	
	2.00	200		3.7	108	1.80	11		13	5.2	212	3.53	11		13	8.2	530	8.83	10	12
	2.25	225		3.8	114	1.90	10		12	5.3	225	3.75	11		13	8.4	560	9.33	11	12
	2.50	250		4.0	123	2.05	10		12	5.5	238	3.97	10		12	8.5	589	9.82	11	12
	2.75	275		4.1	126	2.10	10		11	5.8	249	4.15	10		12	9.1	619	10.32	10	11
	3.00	300		4.3	132	2.20	10		11	6.1	261	4.35	10		11	9.1	646	10.77	10	12
	3.25	325		4.3	135	2.25	10		11	6.2	272	4.53	9		11	9.1	673	11.22	11	12
360°	1.75	175	Olive = 360°	---	---	---	---	Red = 360°	4.9	265	4.42	11	12	Gray = 360°	7.6	659	10.98	11	13	
	2.00	200		3.5	144	2.40	12		14	5.2	283	4.72	11		13	8.2	703	11.72	10	12
	2.25	225		3.8	153	2.55	11		13	5.3	300	5.00	11		13	8.4	745	12.42	11	12
	2.50	250		4.0	161	2.69	10		12	5.5	317	5.28	10		12	8.5	786	13.10	11	12
	2.75	275		4.1	169	2.81	10		12	5.8	333	5.55	10		12	9.1	825	13.75	10	11
	3.00	300		4.3	177	2.94	10		11	6.1	348	5.80	10		11	9.1	862	14.37	10	12
	3.25	325		4.3	183	3.05	10		11	6.2	362	6.03	9		11	9.1	897	14.95	11	12

MP Rotator Performance Data – Metric						
MP Corner Radius: 2.4 to 4.6 m Adjustable Arc Color Code: Turquoise						
Arc	Pressure Bars	Pressure kPa	Color	Radius m	Flow LPH	Flow LPM
45°	1.75	175	Turquoise = 45° to 105°	---	---	0.61
	2.00	200		3.5	36	0.63
	2.25	225		3.8	38	0.68
	2.50	250		4.0	41	0.70
	2.75	275		4.1	42	0.73
	3.00	300		4.3	44	0.75
	3.25	325		4.3	45	0.78
90°	1.75	175	Turquoise = 45° to 105°	3.2	69	1.15
	2.00	200		3.5	76	1.27
	2.25	225		3.8	79	1.31
	2.50	250		4.0	84	1.40
	2.75	275		4.1	86	1.44
	3.00	300		4.3	94	1.57
	3.25	325		4.3	98	1.63
105°	1.75	175	Turquoise = 45° to 105°	3.2	80	1.34
	2.00	200		3.5	89	1.48
	2.25	225		3.8	92	1.53
	2.50	250		4.0	98	1.63
	2.75	275		4.1	102	1.70
	3.00	300		4.3	110	1.83
	3.25	325		4.3	113	1.88

MP Rotator Performance Data – Metric						
MPLCS515 MPRCS515 MPSS530						
Nozzle Model	Pressure Bars	Pressure kPa	Color	Unadjusted Radius LPH	Reduced Radius LPH	Precip Rate mm/hr
MP Left Strip	2.00	200	Ivory	43	30	12
	2.25	225		45	33	12
	2.50	250		48	35	12
	2.75	275		50	36	12
	3.00	300		52	38	12
	3.25	325		54	40	12
	3.50	350		56	41	12
MP Right Strip	2.00	200	Copper	43	30	12
	2.25	225		45	33	12
	2.50	250		48	35	12
	2.75	275		50	36	12
	3.00	300		52	38	12
	3.25	325		54	40	12
	3.50	350		56	41	12
MP Side Strip	2.00	200	Brown	85	60	12
	2.25	225		90	66	12
	2.50	250		95	69	12
	2.75	275		100	73	12
	3.00	300		104	76	12
	3.25	325		108	79	12
	3.50	350		113	83	12



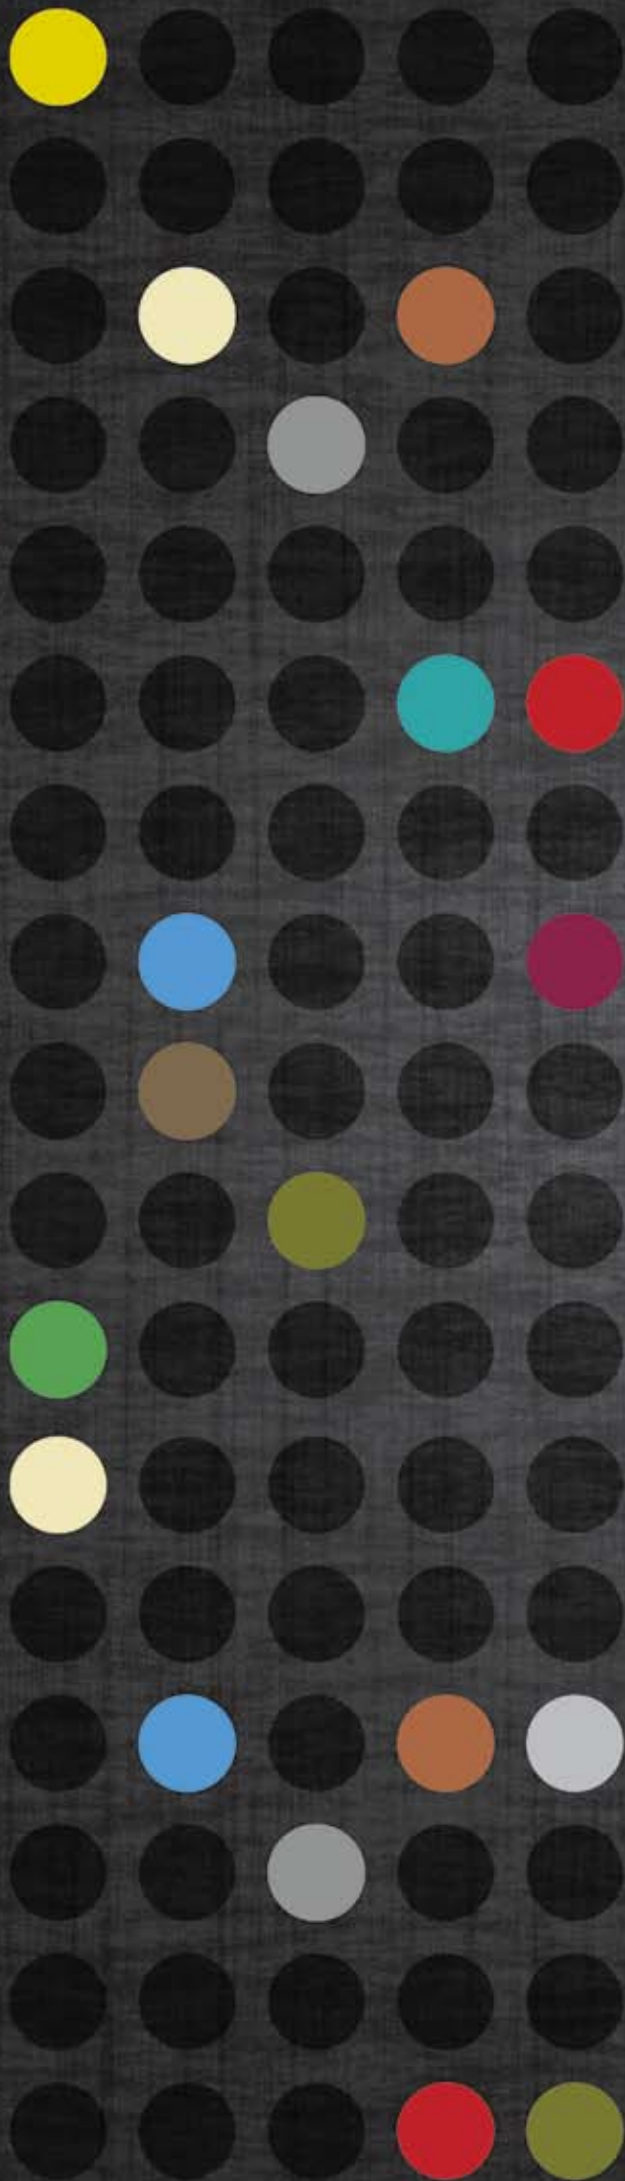

# MP ROTATOR®

DESIGN GUIDE

Hunter®

## The One and Only



The MP Rotator is a multistream rotor like no other. It installs on the Hunter ProSpray™ and MPR40 bodies, giving you

the versatility your project needs. What makes the MP Rotator so special? It is in the MP — true matched precipitation that is. Any combination of the many rotators you see on the right can operate in conjunction with one another. Giving you ultimate flexibility you simply can't duplicate with any other product.



## The MPR40 & The MP Rotator — A Perfect Combination

Designing and working with the MP Rotator gave us the opportunity to make it even better. How? We did this by determining its optimal operating pressure.

**The end result: The MPR40.** We calibrated the MPR40 to provide the MP Rotator with a consistent 2.8 Bars. Even more, we've added a new gray-colored body cap for easy identification. Together, the two are a true blend of technology and performance. In fact, the MPR40 is the only product of its kind. Discover the MPR40. Paired with the MP Rotator, it's a partnership that performs.



### The MPR40 Sprinkler Body:

Four models available: 10 cm (4"), 15 cm (6"), and 30 cm (12") (shrub model not shown).

# The MPR40 Sprinkler Body



MPR40 Key Features	
1	Built-in the stem regulator set at 2.8 Bars
2	New easy-to-identify gray cap
3	Pressure activated, multifunction, no flow-by wiper seal
4	Two-piece ratcheting riser for quick arc alignment
5	Factory-installed drain check valve



Design  
by Color



## Models

**MP1000 (Female Thread) &  
MP1000HT (Male Thread)**

**Radius Range** – 2.4 - 4.6 m including all  
pressure and radius adjustment influence

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**

- Low trajectory, perfect for smaller areas
- For minimum radius, install on a 2.1 Bars regulated Institutional Spray body



**MPCorner (Female Thread) &  
MPCornerHT (Male Thread)**

**Radius Range** – 2.4 - 4.6 m

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**

- Designed for application in areas with less than 90 degrees of arc area necessary
- Does not require adjacent sprinklers to reach into the first 0.9 - 1.5 m of coverage



**MP2000 (Female Thread) &  
MP2000HT (Male Thread)**

**Radius Range** – 4.0 - 6.4 m including all  
pressure and radius adjustment influence

**Pressure Range** – 1.7 - 3.8 Bars

**Application Notes**

- Flow rate is about 1/3 of a 4.6 m spray head; and yet has greater radius and higher uniformity
- For minimum radius, install on a 2.1 Bars regulated Institutional Spray body



**MPLCS515 (Female Thread) &  
MPLCSHT515 (Male Thread)**

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**

- Matched precipitation even after radius reduction with head to head spacing
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Adjustable right edge



**MP3000 (Female Thread) &  
MP3000HT (Male Thread)**

**Radius Range** – 6.7 - 9.1 m including all  
pressure and radius adjustment influence

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**

- Flow rate is about the same as a 4.6 m spray head; and yet has greater radius and higher uniformity
- For minimum radius, provide adjustable zone pressure regulation; Installation on a 2.1 Bars pressure regulated Institutional Spray body is not recommended if radius reduction is needed
- For maximum radius, provide pressures over 2.8 Bars



**MPSS530 (Female Thread) &  
MPSSHT530 (Male Thread)**

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**

- Matched precipitation even after radius reduction with head to head spacing
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Adjustable right edge to fit curved strips



**MPRCS515 (Female Thread) &  
MPRCSHT515 (Male Thread)**

**Pressure Range** – 2.1 - 3.8 Bars

**Application Notes**




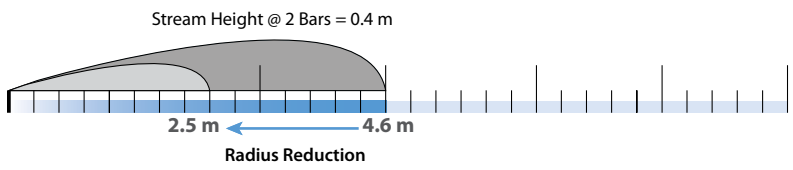



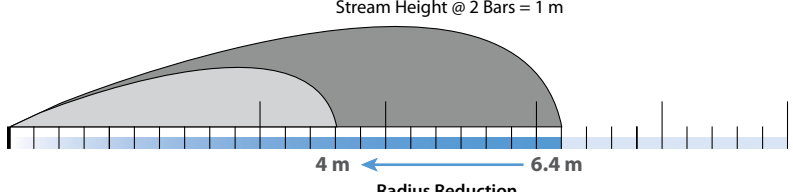



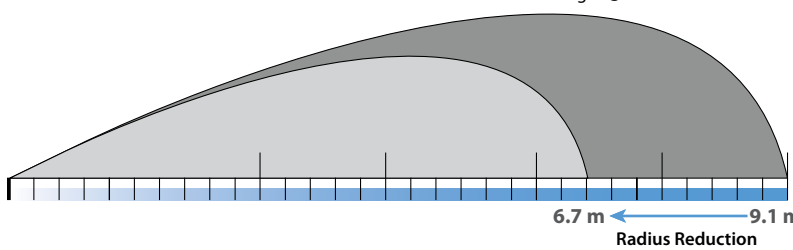



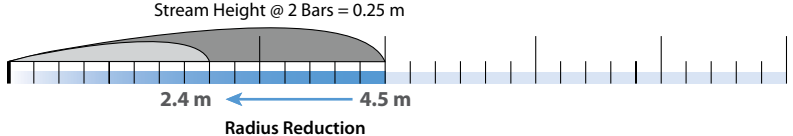

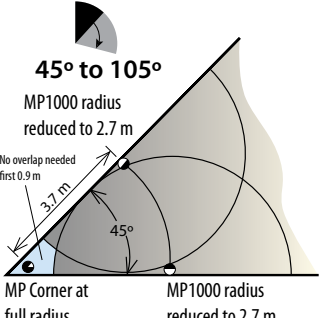
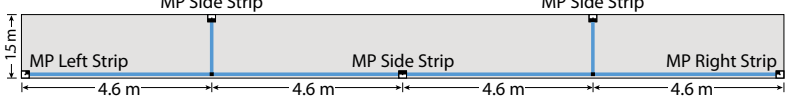



- Matched precipitation even after radius reduction with head to head spacing
- Can be used on the same zone with the MP1000, MP2000 or MP3000 and still maintain matched precipitation
- Edges are fixed



Color-coded for easy identification, the MP Rotator is the perfect solution for water efficiency. The MP Rotator is easy to install and a breeze to adjust.



# Maintain Matched Precipitation – Any Model, Any Arc, Any Radius

Adjustable Radius	Adjustable Arc		
<p>All models of the MP Rotator allow for easy radius adjustment of up to 25% while maintaining automatic matched precipitation.</p>	 <b>90° to 210°</b>	 <b>210° to 270°</b>	 <b>360°</b>
<p><b>MP1000</b></p> 	<p>MP1000-90-210</p>  <b>Maroon</b>	<p>MP1000-210-270</p>  <b>Light Blue</b>	<p>MP1000-360</p>  <b>Olive</b>
<p><b>MP2000</b></p> 	<p>MP2000-90-210</p>  <b>Black</b>	<p>MP2000-210-270</p>  <b>Green</b>	<p>MP2000-360</p>  <b>Red</b>
<p><b>MP3000</b></p> 	<p>MP3000-90-210</p>  <b>Blue</b>	<p>MP3000-210-270</p>  <b>Yellow</b>	<p>MP3000-360</p>  <b>Gray</b>
<p><b>MP Corner</b></p>  <p>The MP Corner is designed for tight corners that are difficult to irrigate properly with conventional sprinklers. It has an adjustable arc from 45° to 105°, maintains MPR at any arc, any radius and can be placed on the same zone with any other MP Rotator model.</p>	<p>MPCorner</p>  <b>Turquoise</b>	 <p><b>45° to 105°</b>  MP1000 radius reduced to 2.7 m  No overlap needed first 0.9 m  3.7 m  45°  MP Corner at full radius      MP1000 radius reduced to 2.7 m</p>	
<p><b>MP Strip</b></p> <p>Example with triangular spacing.</p>  <p>The three MP Strip models of the MP Rotator family offer an exciting alternative to irrigate strip areas. Strip models offer improved uniformity and excellent wind-fighting ability. The reduced flow rate compared to conventional sprays makes longer runs and/or fewer zones possible.</p>	<p>MPLCS-515 (Left Strip)</p>  <b>Ivory</b>	<p>MPSS-530 (Side Strip)</p>  <b>Brown</b>	<p>MPRCS-515 (Right Strip)</p>  <b>Copper</b>